

Websites:
<http://www.sciencepub.net>
<http://www.sciencepub.net/researcher>

Emails:
editor@sciencepub.net
marslandresearcher@gmail.com

Researcher

MARSLAND PRESS
 Multidisciplinary Academic Journal Publisher



H^∞ and μ - synthesis Design of Coupled Tanks Level Control

Mustefa Jibril¹, Messay Tadesse², Eliyas Alemayehu Tadesse³

¹. School of Electrical & Computer Engineering, Dire Dawa Institute of Technology, Dire Dawa, Ethiopia

². School of Electrical & Computer Engineering, Dire Dawa Institute of Technology, Dire Dawa, Ethiopia

³. Faculty of Electrical & Computer Engineering, Jimma Institute of Technology, Jimma, Ethiopia

mustefazinet1981@gmail.com

Abstract: In this paper, the design and analysis of coupled tank water level control system is done using robust control theory. The main aim of this work is to improve level controlling mechanisms in industries and household areas. In this paper, H^∞ and μ –synthesis controllers are designed to improve the level control system. The coupled tank water level control system is designed using the proposed controller's comparison and tested for tracking a reference level signals (step, sine wave and random) and simulation results have been analyzed successfully. Finally the comparative simulation results prove the effectiveness of the proposed coupled tank water level control system with H^∞ controller for improving the tracking mechanism performance of the system.

[Mustefa Jibril, Messay Tadesse, Eliyas Alemayehu Tadesse. **H^∞ and μ - synthesis Design of Coupled Tanks Level Control.** *Researcher* 2020;12(6):22-26]. ISSN 1553-9865 (print); ISSN 2163-8950 (online). <http://www.sciencepub.net/researcher>. 4. doi: [10.7537/marsrsj120620.04](https://doi.org/10.7537/marsrsj120620.04).

Keywords: H infinity, μ –synthesis, robust control theory

1. Introduction

Many in advance works dealt with various strategies of controlling of liquid level of coupled tanks in industrial and home packages. Broadly this manage problem can be completed underneath two method: mechanical methods and electrical methods. Float ball type liquid level control is a famous technique of control nevertheless utilized in practice for regular applications such as overhead tank overflow restrictors etc. The electrical techniques of control include a microcontroller-control based circuits which robotically expect the liquid level and for that reason active the circuit to perform the action. In spite of several such to be had techniques, still there are new techniques on this application so as keep away from dangerous working situations in commercial boilers.

2. Mathematical model of the two tanks system

Figure 1 represents a two-tank liquid-level control system. Definitions of the system parameters are

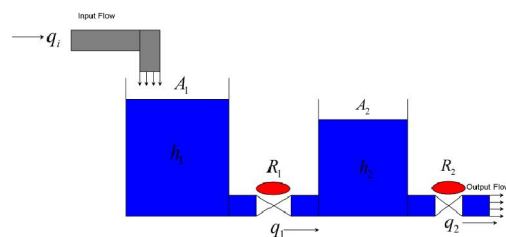


Figure 1 two-tank liquid-level control system

q_i, q_1, q_2 = rates of flow of fluid

h_1, h_2 = heights of fluid level

R_1, R_2 = flow resistance

A_1, A_2 = cross – sectional tank areas

The following basic linear relationships hold for this system:

$$q = \frac{h}{R} = \text{rate of flow through orifice} \quad (1)$$

$$q_n = (\tan k \text{ input rate flow}) - (\tan k \text{ output rate flow}) = \text{net tan k rate flow} = ADh \quad (2)$$

Applying equation (2) to tanks 1 and 2 respectively yields:

$$q_{n1} = A_1 Dh_1 = q_i - q_1 = q_i - \frac{h_1 - h_2}{R_1} \quad (3)$$

$$q_{n2} = A_2 D h_2 = q_1 - q_2 = \frac{h_1 - h_2}{R_1} - \frac{h_2}{R_2} \quad (4)$$

Letting $x_1 = h_1$, $x_2 = h_2$, and $u = q_1$ in Equation (3) and (4) reveals that x_1 and x_2 are independent state variables. Thus, the state equation is

$$\begin{pmatrix} \dot{x}_1 \\ \dot{x}_2 \end{pmatrix} = \begin{pmatrix} -\frac{1}{R_1 A_1} & \frac{1}{R_1 A_1} \\ \frac{1}{R_1 A_2} & -\frac{1}{R_1 A_2} - \frac{1}{R_2 A_2} \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \end{pmatrix} + \begin{pmatrix} \frac{1}{A_1} \\ 0 \end{pmatrix} u \quad (5)$$

The levels of the two tanks are the outputs of the system. Letting $y_1 = x_1 = h_1$ and $y_2 = x_2 = h_2$ yields

$$y = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} x \quad (6)$$

The parameters of the tank is shown in Table 1 below

Table 1 parameters of the tank

| No | Parameter | Symbol | value |
|----|--------------|--------|---------------------|
| 1 | Area 1 | A_1 | $2.4 m^2$ |
| 2 | Area 2 | A_2 | $1.8 m^2$ |
| 3 | Resistance 1 | R_1 | $0.4 \frac{s}{m^2}$ |
| 4 | Resistance 2 | R_2 | $0.7 \frac{s}{m^2}$ |

$$\begin{pmatrix} \dot{x}_1 \\ \dot{x}_2 \end{pmatrix} = \begin{pmatrix} -1.0417 & 1.0417 \\ 1.39 & -2.184 \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \end{pmatrix} + \begin{pmatrix} 0.42 \\ 0 \end{pmatrix} u$$

$$y = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} x$$

3. Weighting Functions

It is required that within the H^∞ framework to use weighting functions to reconciliation distinct overall performance targets. The performance aim of a comments system may be normally determined in phrases of requirements at the sensitivity features and/or complementary sensitivity features or in phrases of some other closed loop transfer functions. The odds of occupying weighted overall performance in multivariable system design is firstly, some part of a vector signal are generally more essential than others, secondly, measuring each signal will not be inside the equal unit. For instance, a few part of the output error signal can be measured in terms of period, and others may be measured in phrases of voltage. Therefore, weighting functions play a vital rule to kind those component similar. The weighting functions are mentioned beneath.

W_{h1} and W_{h2} are used to keep the water level of the tank small over the desired range. The water level W_{h1} is given as

$$W_{h1} = \frac{1}{s+5}$$

The water level h_2 is used via weighting function W_{h2} . The weighting function is given as

$$W_{h2} = \frac{5}{0.2s+10}$$

4. The Proposed Controller Design

The design of water level of the tank system to provide level control is evolved the use of H^∞ and μ -synthesis controllers design. In the water level of the tank system, the proposed controllers design to control the level of the water within the two tanks. The predominant purpose of the controller design is to decrease the error of the level of the two tanks. Synthesis method is used to design the proposed controllers through reaching the overall performance objective through minimizing the weighted transfer characteristic norm. The water level of the tank system with H^∞ and μ -synthesis controllers system interconnections block diagram for tracking level h_1 and level h_2 is shown in Figure 2 and Figure 3 respectively.

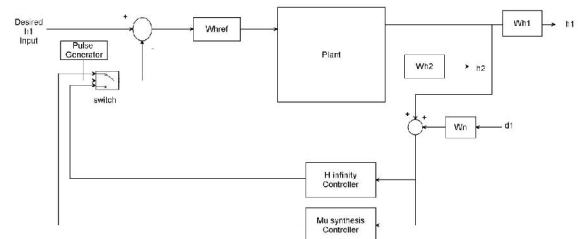


Figure 2: water level of the tank system with H^∞ and μ -synthesis controllers system interconnections block diagram for tracking level h_1

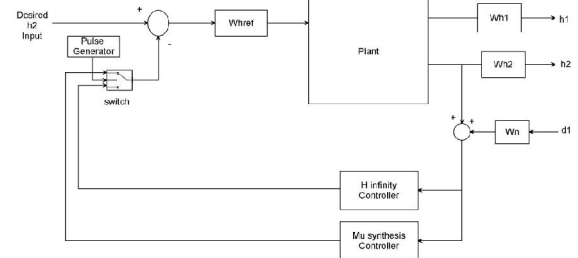


Figure 3: water level of the tank system with H^∞ and μ -synthesis controllers system interconnections block diagram for tracking level h_2

A μ -synthesis controller is synthesized the usage of D-K iteration. The D-K iteration method is an

approximation to synthesis that tries to synthesize the controller. There is one manipulate input the desired level signal. There are two purposes for the weighted functions norm: for a given norm, there will be a direct evaluation for extraordinary performance targets and they are used for understanding the frequency data incorporated into the analysis. The output or feedback signal y is

$$y = (h_{1,2} + d_1 \times W_n)$$

The controller's acts on the y signal to produce the feedback level signal. The W_n block modeled the disturbance inside the channel. W_n is given a disturbance noise of 0.05m.

$$W_n = 0.05$$

W_n is used to model the noise of the level sensor. The magnitude of the level disturbance is scaled using the weight W_{href} . Let us assume the maximum level disturbance is 0.15 m which means

$$W_{href} = 0.15$$

5. Result and Discussion

5.1 Comparison of the Water Level of the Tank System with H_∞ and μ - synthesis Controllers

In this subsection, we simulate the water level of the tank system with H_∞ controller and μ - synthesis controller for the tracking of desired level using step, sine wave and random desired input signals.

5.1.1 Simulation of a Desired Level Step Signal

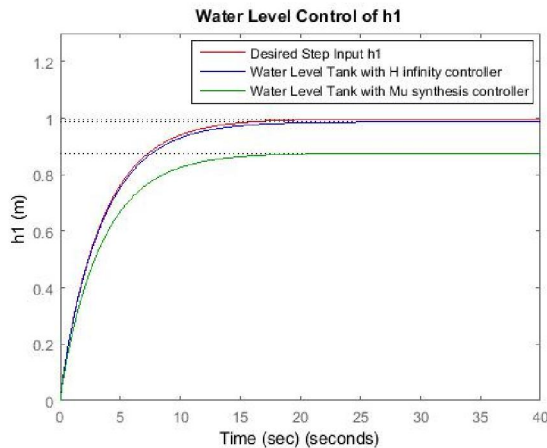


Figure 4: Simulation of the actual and desired level for h1

The simulation for a step input level signal is shown below. In this simulation, we simulate the water level of the tank system with H_∞ controller and μ - synthesis controller for the tracking of desired level signal.

The tracking of desired level signal simulation output is shown in Figure 4 and Figure 5 respectively for tracking of desired level h1 and h2 respectively.

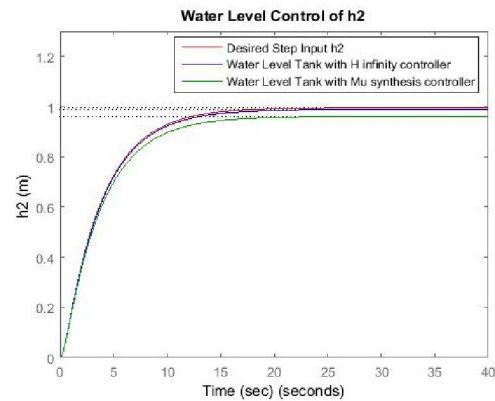


Figure 5: Simulation of the actual and desired level for h2

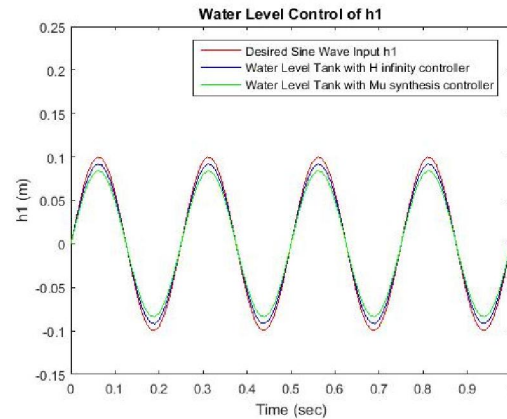


Figure 6: Simulation of the actual and desired level for h1

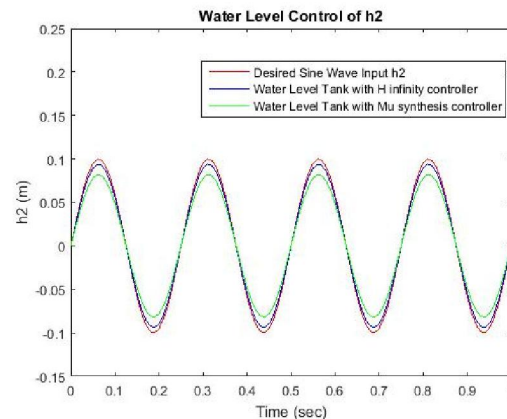


Figure 7: Simulation of the actual and desired level for h2

5.1.2 Simulation of a Desired Level Sine Wave Signal

The simulation for a sine wave input level signal is shown. In this simulation, we simulate the water level of the tank system with H^∞ controller and μ - synthesis controller for the tracking of desired level signal.

The tracking of desired level signal simulation output is shown in Figure 6 and Figure 7 respectively for tracking of desired level h_1 and h_2 respectively.

5.1.3 Simulation of a Desired Level Random Signal

The simulation for a random input level signal is shown below. In this simulation, we simulate the water level of the tank system with H^∞ controller and μ - synthesis controller for the tracking of desired level signal.

The tracking of desired level signal simulation output is shown in Figure 8 and Figure 9 respectively for tracking of desired level h_1 and h_2 respectively.

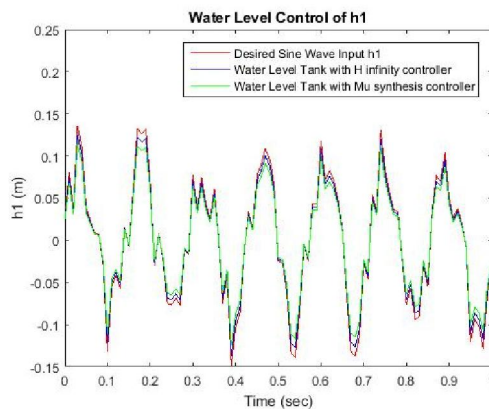


Figure 8: Simulation of the actual and desired level for h_1

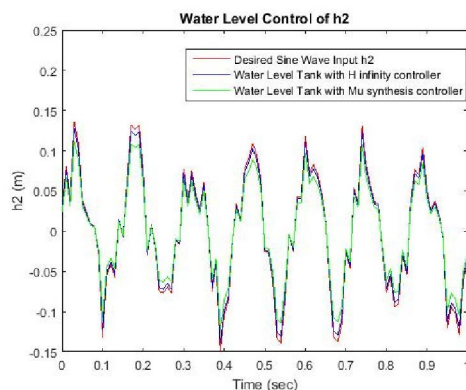


Figure 9: Simulation of the actual and desired level for h_2

5.1.4 Numerical Values of the Simulation Outputs

The numerical values of the simulation output for the tracking of desired level using step, sine wave and random desired input signals is shown in Table 2, Table 3 and Table 4 below.

Table 2: Numerical steady state values of the desired step signal simulation output

| No | Systems | h_1 | h_2 |
|----|----------------------|--------|--------|
| 1 | Desired Input signal | 1 m | 1 m |
| 2 | H^∞ | 0.99 m | 1 m |
| 3 | μ - synthesis | 0.87 m | 0.92 m |

Table 2 shows us the water level of the tank system with H^∞ controller have track the desired step input signal in the level h_1 and h_2 with good improvement than the water level of the tank system with μ - synthesis controller.

Table 3: Numerical peak values of the desired sine wave signal simulation output

| No | Systems | h_1 | h_2 |
|----|----------------------|---------|---------|
| 1 | Desired Input signal | 0.1 m | 0.1 m |
| 2 | H^∞ | 0.097 m | 0.096 m |
| 3 | μ - synthesis | 0.085 m | 0.084 m |

Table 3 shows us the water level of the tank system with H^∞ controller have track the desired step input signal in the level h_1 and h_2 with good improvement than the water level of the tank system with μ - synthesis controller.

Table 4: Numerical peak values of the desired random signal simulation output

| No | Systems | h_1 | h_2 |
|----|----------------------|--------|---------|
| 1 | Desired Input signal | 0.14 m | 0.14 m |
| 2 | H^∞ | 0.13 m | 0.138 m |
| 3 | μ - synthesis | 0.12 m | 0.115 m |

Table 4 shows us the water level of the tank system with H^∞ controller have track the desired step input signal in the level h_1 and h_2 with good improvement than the water level of the tank system with μ - synthesis controller.

6. Conclusion

In this paper, the coupled tank water level control system with H^∞ and μ - synthesis controllers

is designed, controlled and analyzed with Matlab/Script toolbox and a fascinating results have been analyzed successfully. Comparison of the system with the proposed controllers is done for tracking a three reference level signals (step, sine wave and random) and the coupled tank water level control system with H_{∞} controller improve the tracking mechanism in the three reference input signals and shows that this system can be designed with robust controllers in industries and home appliances systems.

Reference

1. M Khairudin et al. "Water Level Control Based Fuzzy Logic Controller: Simulation and Experimental Works" IOP Conference Series: Materials Science and Engineering, Vol. 535, 2019.
2. Riccardo V. et al. "Instability of the Tank Level Control System of Water Mains in Mountainous Environments" Journal of Hydraulic Engineering, Vol. 145, Issue. 7, 2019.
3. Nishmitha et al. "Water Tank Monitoring System" International Journal of Engineering Research & Technology, Vol. 7, Issue. 8, 2019.
4. Mostafa A. et al. "PID Controller Design for Two Tanks Liquid Level Control System using Matlab" International Journal of Electrical and Computer Engineering, Vol. 5, No. 3, 2018.
5. Reza F. et al. "Design and Implementation of Water Level Control for Two Coupled Tank as a Simple and Low Cost Apparatus in Automatic Control Engineering Education" Journal of Physics: Conference Series, Vol. 1153, 2018.
6. Mallikarjun H. et al. "Flexible Automatic Water Level Controller and Indicator" World Journal of Technology, Engineering and Research, Vol. 3, Issue. 1, 2018.

6/20/2020